


153 Series



Please see the attached pages for detailed specifications.

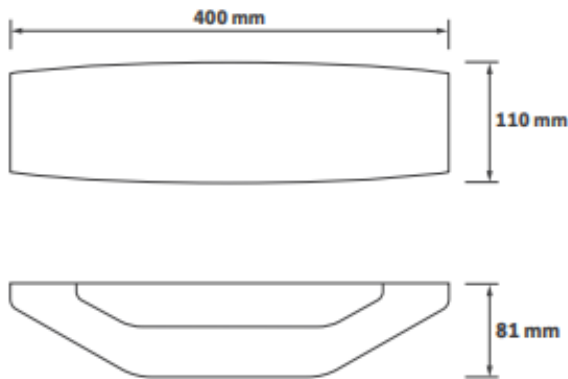

| | |
|--------------------------------------|--|
| Mounting: | Wall mounted |
| Body material: | Aluminium |
| Colour: | Various RAL colours available |
| LED module: | Tridonic Integral LED driver |
| Colour temperature: | White (RAL9016) as standard, Black (RAL9005) option available |
| Colour Rendering Index (CRI): | CRI 80> |
| Driver: | Tridonic |
| Emergency unit: | No |
| Movement sensor: | Available on request |
| Daylight control sensor: | Available on request |
| Operating temperature range: | 0°C to +40°C |
| IP Class: | N/A |
| Power: | N/A |
| Lighting direction: | Direct/Indirect |
| Reflector type: | N/A |
| Light distribution: | Symmetric |
| Diffuser: | Opal acrylic diffusers for homogenous illumination |
| General data: | 5 Years standard warranty, possible extension with project registration Different lumen output or wattage available on request All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends on components used |