



36 Series

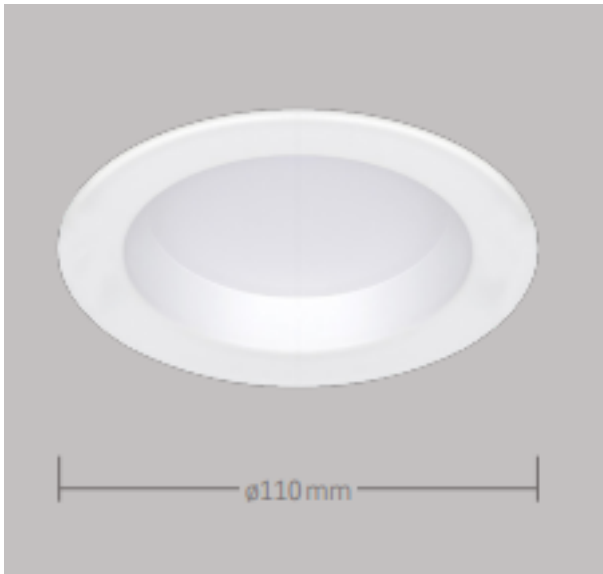

Please see the attached pages for detailed specifications.

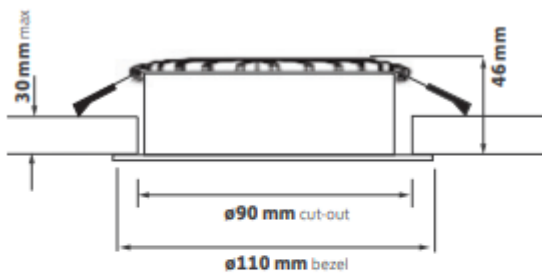

Mounting:	Recessed
Body material:	Mild Steel
Colour:	White RAL9016
LED module:	Tridonic
Colour temperature:	3000k, 4000k, 5500k
Colour Rendering Index (CRI):	CRI 80>
Driver:	Tridonic
Emergency unit:	Yes
Movement sensor:	N/A
Daylight control sensor:	N/A
Operating temperature range:	Up to 40°C
IP Class:	Mini commercial IP54 downlight
Power:	9w
Lighting direction:	Direct
Reflector type:	N/A
Light distribution:	Symmetric
Diffuser:	Recessed Opal Diffuser
General data:	5 Years standard warranty, possible extension with project registration Different lumen output or wattage available on request All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends on components used