

**GALL SP**




Outdoor IP65 LED luminaire.

- Mounting:** On circular pole ( not included )
- Body material:** Aluminium
- Colour:** Standard gray RAL 9006, other RAL colours on request ( please add RAL code after index number )
- LED module:** Philips, Osram or Tridonic LED module included
- Colour temperature:** 3000K or 4000K
- Colour Rendering Index (CRI)** >80 in standard
- Driver:** Electronic driver
- Emergency unit:** N/A
- Movement sensor:** N/A
- Daylight control sensor:** N/A
- Operating temperature range:** -20°C ... +40°C
- IP Class:** IP65
- Power:** 220-240V 50/60Hz
- Lighting direction:** Direct / indirect lighting
- Reflector type:** Aluminium glossy
- Light distribution:** Symmetric
- Diffusor:** Clear glass, other on request
- General data:** 5 Years standard warranty

All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used

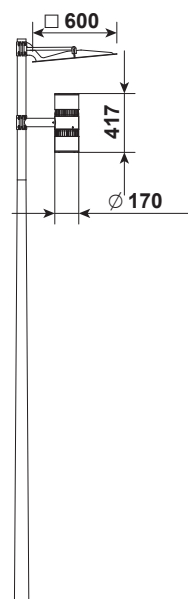

Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
6020.2200/830	2200	20	3000	Ra > 80	50.000	5	3	25,00
6020.2200/840	2200	20	4000	Ra > 80	50.000	5	3	25,00
6020.4000/830	4000	36	3000	Ra > 80	50.000	5	3	25,00
6020.4000/840	4000	36	4000	Ra > 80	50.000	5	3	25,00
6020.6000/830	6000	54	3000	Ra > 80	50.000	5	3	25,00
6020.6000/840	6000	54	4000	Ra > 80	50.000	5	3	25,00