

## SATURN 1500 LED




Pendant direct or direct / indirect LED luminaire.


- Mounting:** Suspended on 1,5m long steel wire suspension ( with wire length control )
- Body material:** Steel and aluminium
- Colour:** Standard Gray 9006, other RAL colours on request ( please add RAL code after index number )
- LED module:** Philips / Osram or Tridonic LED module included
- Colour temperature:** 3000K or 4000K
- Colour Rendering Index (CRI):** >80 in standard
- Driver:** Electronic driver in standard, DALI on request
- Emergency unit:** On request - Standard or DALI 3 hour emergency unit
- Movement sensor:** on request
- Daylight control sensor:** on request
- Operating temperature range:** 0°C ... +40°C
- IP Class:** IP20 in standard, IP44 on request
- Power:** 220-240V 50/60Hz
- Lighting direction:** Direct lighting - index 5971, 4838, 5665, 5666  
direct / indirect lighting - index 5971.UD, 4838.UD, 5665.UD, 5666.UD
- Reflector type:** Aluminium white
- Light distribution:** Symmetric
- Diffuser:** White acrylic diffuser [WD] in standard, acrylic frosted [AC], microprismatic [MPR] or any other on request.
- General data:** 5 Years standard warranty  
Different lumen output or wattage available on request  
All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist  
Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.  
System power consumption (LED module & driver) depends on components used




Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [h]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
4838.16500/830	16500	105	3000	Ra > 80	50.000	5	3	15,00
4838.16500/840	16500	105	4000	Ra > 80	50.000	5	3	15,00
<b>UP/DN</b>								
4838.UD.16500/830	16500	105	3000	Ra > 80	50.000	5	3	15,00
4838.UD.16500/840	16500	105	4000	Ra > 80	50.000	5	3	15,00




### Available luminaire versions

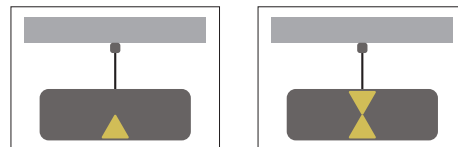

[WD] diffuser



[AC] diffuser



[MPR] diffuser

