


MARLITE UK

ACOUSTIC RIVANO LINEAR

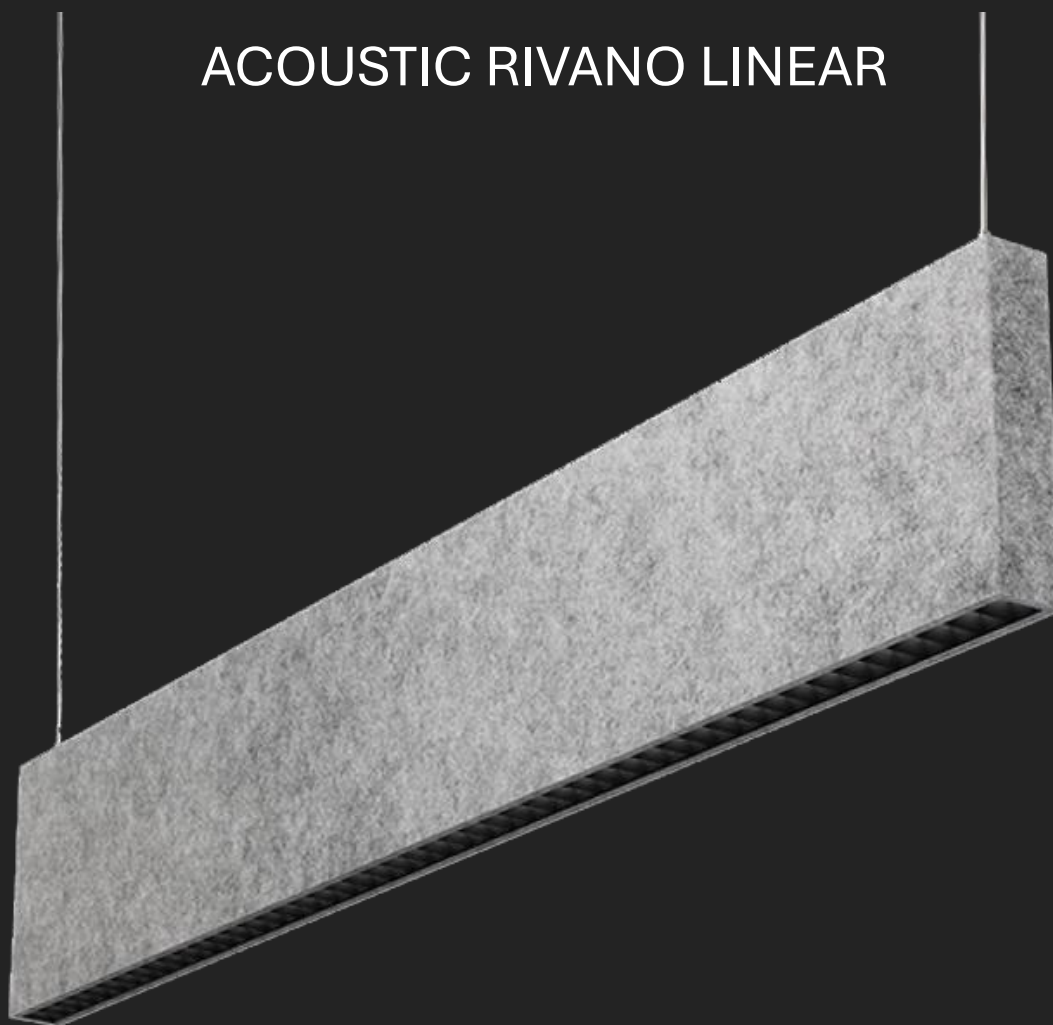

ACOUSTIC RIVANO LINEAR

The acoustic panels are designed to absorb the echo and reverberation associated with open concept spaces, exposed concrete, exposed ceilings and large windows. For sound comfort, ACOUSTIC RIVANO LINEAR is available with an 8 mm thick acoustic panel as standard. Modern and decorative design for professional lighting

Mounting:	Surface/Pendant
Body material:	PET
Colour:	Various RAL colours available
LED module:	First brand LED module
Colour temperature:	2700K – 6500K
Colour Rendering Index (CRI):	CRI 80> Optional CRI 80>
Driver:	First brand driver
Emergency unit:	Available on request
Movement sensor:	Available on request
Daylight control sensor:	Available on request
Operating temperature range:	-20°C to +50°C
IP Class:	IP20
Power:	220-240V 50/60Hz
Lighting direction:	Direct
Reflector type:	N/A
Light distribution:	Symmetric
Diffuser:	Anti-Glare lens

ACOUSTIC RIVANO LINEAR

Images

