


Reflector XL Shade



Please see the attached pages for detailed specifications.

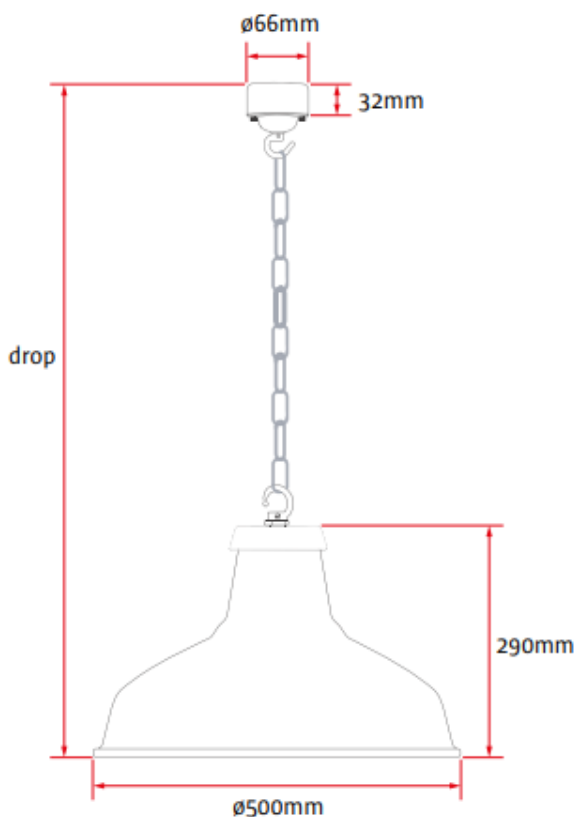

Mounting:	Pendant
Body material:	Low Carbon Steel
Colour:	Various RAL colours available
LED module:	Xicato
Colour temperature:	2700K, 3000K, 3500K, 4000K
Colour Rendering Index (CRI):	+80 (Xicato Standard Series) +95 (Xicato Artist Series)
Driver:	Xicato
Emergency unit:	No
Movement sensor:	Available on request
Daylight control sensor:	Available on request
Operating temperature range:	Ambient -20°C/+30°C
IP Class:	IP20 / IP65
Power:	N/A
Lighting direction:	Direct
Reflector type:	N/A
Light distribution:	Symmetric
Diffuser:	N/A
General data:	5 Years standard warranty, possible extension with project registration Different lumen output or wattage available on request All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends on components used