



BAMBINO

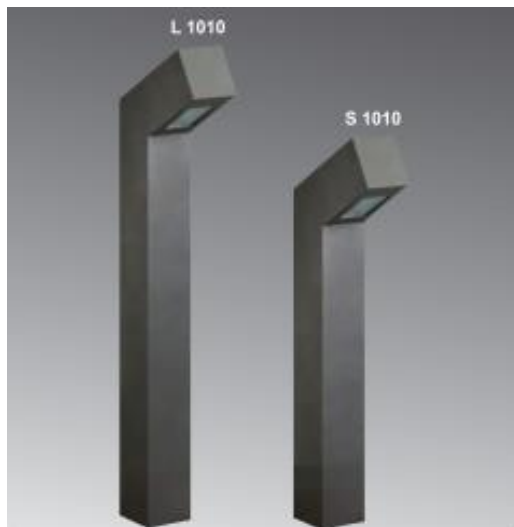

Please see the attached pages for detailed specifications.



Mounting:	Bollard
Body material:	Aluminium
Colour:	Various RAL colours available
LED module:	First brand LED module
Colour temperature:	2700k – 6500k
Colour Rendering Index (CRI):	CRI>80
Driver:	First brand driver
Emergency unit:	No
Movement sensor:	Available on request
Daylight control sensor:	Available on request
Operating temperature range:	-20°C to +50°C
IP Class:	IP65
Power:	N/A
Lighting direction:	Direct
Reflector type:	N/A
Light distribution:	Asymmetric
Diffuser:	Glass
General data:	<p>5 Years standard warranty, possible extension with project registration</p> <p>Different lumen output or wattage available on request</p> <p>All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist</p> <p>Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%.</p> <p>System power consumption (LED module & driver) depends on components used</p>