


PROFI 60 HEXA SYSTEM

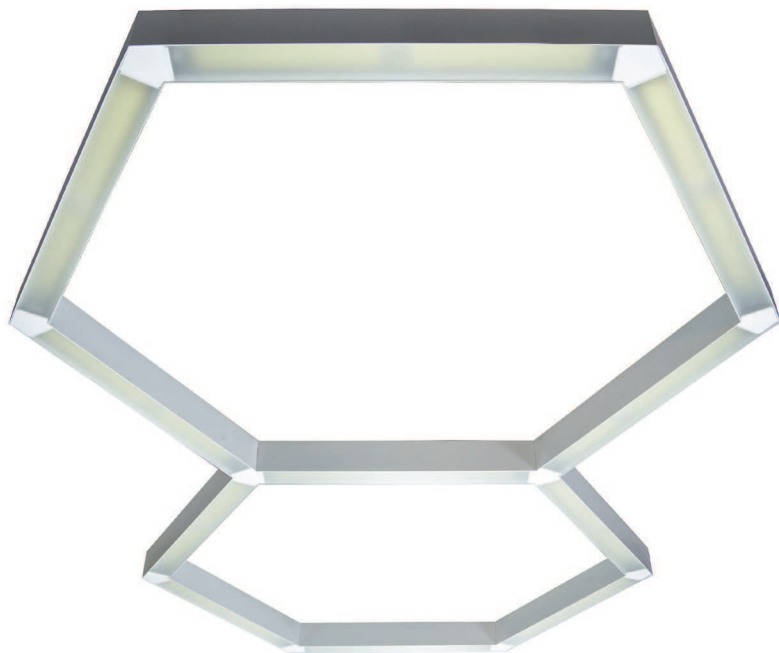

Suspended Hexagonal lighting system available in Single (Hexa 1) or Double (Hexa 2) sections, which can be connected together into lighting systems

- Mounting:** Suspended, standard 1,5 m steel wire suspensions included
- Body material:** Aluminium profile
- Colour:** Standard Gray 9006, other RAL colours on request (please add RAL code after index number)
- LED module:** Philips / Osram or Tridonic LED module included
- Colour temperature:** 3000K or 4000K
- Colour Rendering Index (CRI):** >80 in standard , other on request
- Driver:** Electronic driver in standard, DALI on request
- Emergency unit:** on request - Standard or DALI 3 hour emergency unit
- Movement sensor:** on request
- Daylight control sensor:** on request
- Operating temperature range:** 0°C ... +40°C
- IP Class:** IP20
- Power:** 220-240V 50/60Hz
- Lighting direction:** Direct
- Reflector type:** aluminium white
- Light distribution:** Symmetric

Diffuser: White acrylic diffuser [WD] in standard, acrylic frosted [AC], microprismatic [MPR] or any other on request.

General data: 5 Years standard warranty
Different lumen output or wattage available on request

All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist

Wattage of products may vary due to constant LED efficacy improvements. Luminous flux & Luminaire Power tolerance +/- 10%.

System power consumption (LED module & driver) depends on components used



Index no.	Lumen output [lm]	Power [W]	Colour temp. [K]	CRI	Lifetime [H]	Warranty [Years]	MacAdam [SDCM]	Weight [kg]
SINGLE HEXA								
6512.13200/830	13200	84	3000	Ra > 80	50.000	5	5	9,00
6512.13200/840	13200	84	4000	Ra > 80	50.000	5	3	9,00
DOUBLE HEXA								
6513.24200/830	24200	154	3000	Ra > 80	50.000	5	3	16,50
6513.24200/840	24200	154	4000	Ra > 80	50.000	5	3	16,50

[WD] diffuser

[AC] diffuser

[MPR] diffuser

