


33 Series



Please see the attached pages for detailed specifications.

Mounting:	Recessed
Body material:	Die-cast Aluminium
Colour:	White (RAL9003)
LED module:	Philips/Tridonic
Colour temperature:	3000k/4000k
Colour Rendering Index (CRI):	CRI80>
Driver:	First Brand Driver
Emergency unit:	Yes
Movement sensor:	No
Daylight control sensor:	Yes
Operating temperature range:	Up to 40°C
IP Class:	IP20
Power:	8w
Lighting direction:	Direct
Reflector type:	Injection moulded 36° faceted reflector.
Light distribution:	Symmetric
Diffuser:	36° Faceted Reflector
General data:	<p>5 Years standard warranty, possible extension with project registration</p> <p>Different lumen output or wattage available on request</p> <p>All other technical features such as : Luminaire Efficacy, LOR, Lumen maintenance L/B etc. available in our pricelist</p> <p>Wattage of products may vary due to constant LED efficacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%.</p> <p>System power consumption (LED module & driver) depends on components used</p>

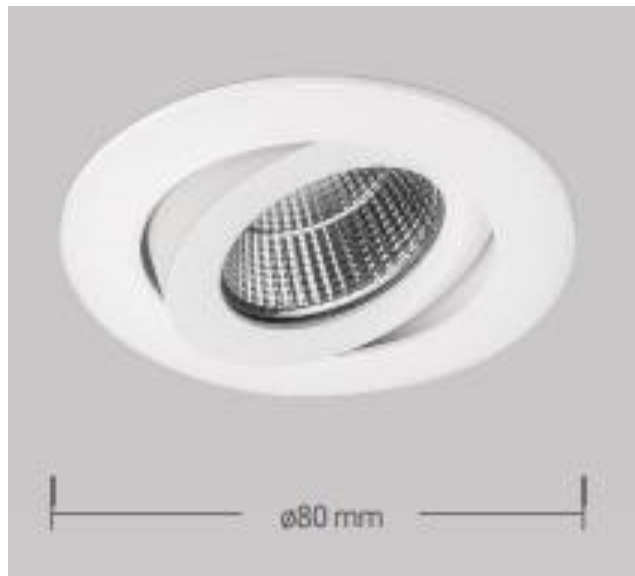