


181 Series



Please see the attached pages for detailed specifications.

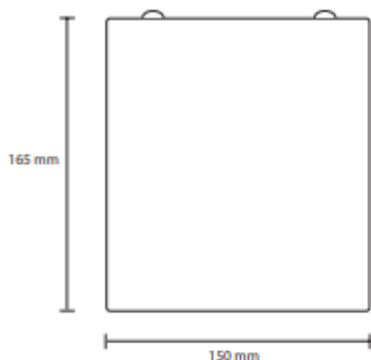

Mounting:	Surface
Body material:	Mild Steel
Colour:	Various RAL colours available
LED module:	Tridonic
Colour temperature:	3000k, 4000k
Colour Rendering Index (CRI):	CRI 80>
Driver:	Tridonic
Emergency unit:	No
Movement sensor:	No
Daylight control sensor:	N/A
Operating temperature range:	N/A
IP Class:	IP20
Power:	8W -14W-19W
Lighting direction:	Direct
Reflector type:	Multi-faceted 40° reflector as standard
Light distribution:	Symmetric
Diffuser:	N/A
General data:	5 Years standard warranty, possible extension with project registration Different lumen output or wattage available on request All other technical features such as : Luminaire Eicacy, LOR, Lumen maintenance L/B etc. available in our pricelist Wattage of products may vary due to constant LED eicacy improvements. Luminous lux & Luminaire Power tolerance +/- 10%. System power consumption (LED module & driver) depends on components used